


8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

- NOTES:
 1 ALL DIMENSIONS SHOWN ARE FINISH OPERATIONAL DIMENSIONS WHICH INCLUDE RESIDUAL COATINGS UNLESS OTHERWISE SPECIFIED.
 2 PART TO BE PACKED PROPERLY TO AVOID ANY DAMAGE WHILE SHIPPING & HANDLING.
 3 ALL HORIZONTAL DIMENSIONS ARE SYMMETRICAL ABOUT CENTER LINE UNLESS OTHERWISE SPECIFIED.

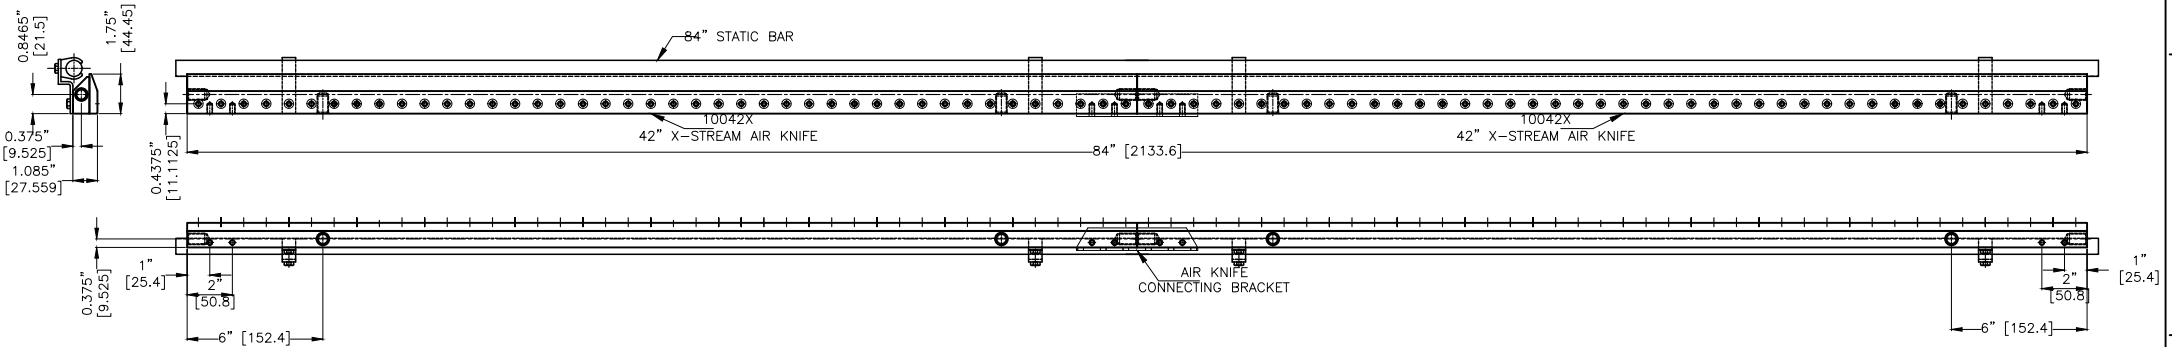

PROPRIETARY
 REPRODUCTION OR DISTRIBUTION
 WITHOUT WRITTEN CONSENT OF
 NEXFLOW™ IS PROHIBITED.

THIRD ANGLE PROJECTION		-	-	-	-	REQUIREMENTS-UNLESS OTHERWISE SPECIFIED	CONTRACT NUMBER --	NEX FLOW AIR PRODUCTS CORP.					
		-	-	-	-	GENERAL	CLIENT --	10520 YONGE STREET, UNIT 35B-220, RICHMOND HILL, ON L4C 3C7					
MATERIAL	ALUMINIUM	-	-	-	-	1. DIMS ARE IN INCHES (MM)	CONTRACTOR --	DATE: 10/04/2021	TITLE OUTLINE DRAWING OF				
		-	-	-	-	2. DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH ANSI Y14.5 (1982)	DESIGN --	CHECKED LES	84" X-STREAM AIR BLADE AIR KNIFE WITH RN IONIZER / VS IONIZER				
FINISH	-	-	-	-	-	3. MACHINE FINISH 125 MICRO INCH RMS	PROJECT --	Q.A. --	SIZE --	CAGE CODE --	DWG NO 15084X - 16084X	RELEASE --	REV --
		-	-	-	-	4. INTERNAL RADII .015	STRESS --	MANUFACTURING --	SCALE 1:1	CAD NO --	SHEET 1 OF 1		
		NEXT ASSEMBLY	USED ON	QTY PER ASSY	PART NO	5. BREAK SHARP CORNERS .005 TO .015	MECHANISM --	ELECTRICAL --					
		PART NO				6. LINEAR DIMS. .XXX = .005 .XX = .010 .X = .030							
						2. ANGLES = ± 1/2°							
						3. RUNOUT .010 TIR							
						4. HOLES IN ACCORDANCE WITH AND 10387							

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1