
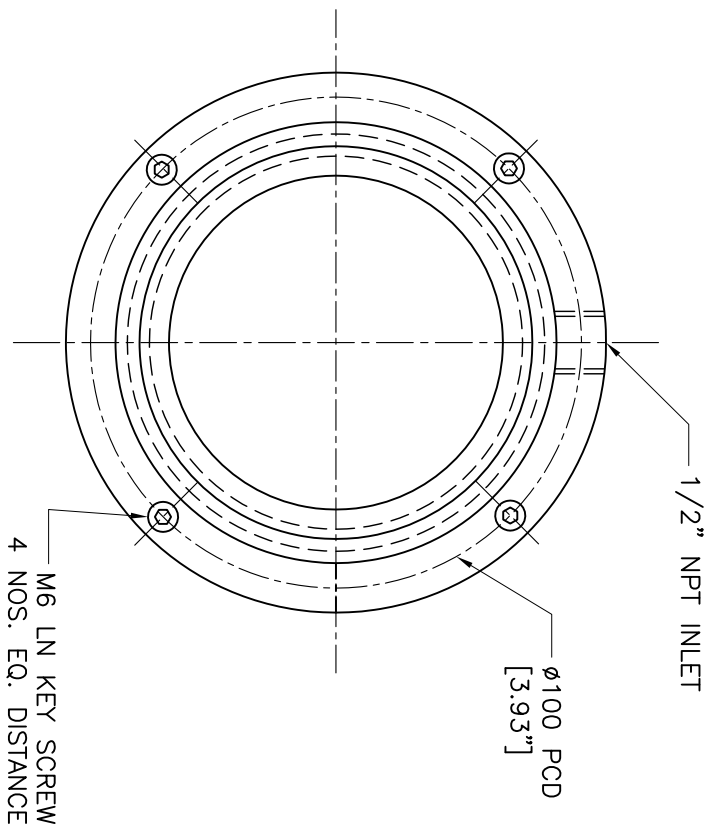


NOTES:
 1 ALL DIMENSIONS SHOWN ARE FINISH OPERATIONAL DIMENSIONS WHICH INCLUDE RESIDUAL COATINGS UNLESS OTHERWISE SPECIFIED.

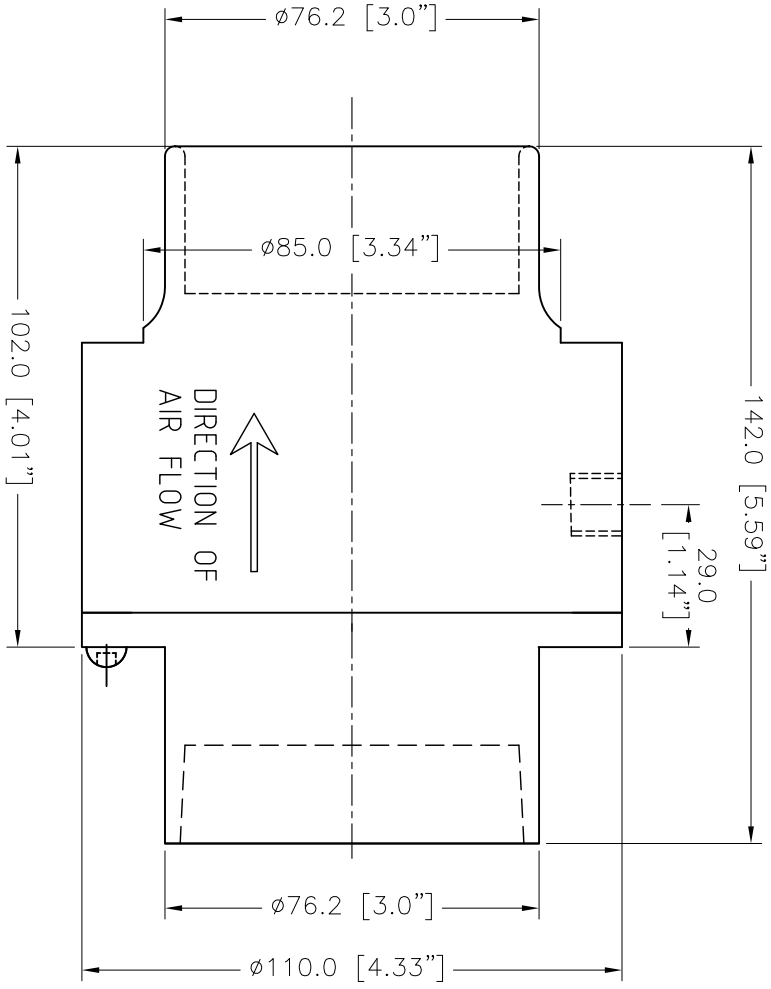

FINISH	S.S. 304		REQUIREMENTS-UNLESS OTHERWISE SPECIFIED		CONTRACT NUMBER		NEX FLOW AIR PRODUCTS CORP.	
			1. DIMS ARE IN INCHES (MM) 2. ACCORDANCE WITH ANSI Y14.3 (2002) 3. MACHINE FINISH 125 MICRO INCH RMS 4. SURFACE STRENGTH 0.005 TO 0.015 LAMINATE	1. LINEAR DIMS: .005 .010 .020 .030 .040 .050 .060 .070 .080 .090 .100 .125 .150 .175 .200 .250 .300 .375 .450 .500 .625 .750 .875 1.000 1.250 1.500 1.750 2.000 2.500 3.000 3.500 4.000 4.500 5.000 6.000 7.000 8.000 9.000 10.000	1. DIMS ARE IN INCHES (MM) 2. ACCORDANCE WITH ANSI Y14.3 (2002) 3. MACHINE FINISH 125 MICRO INCH RMS 4. SURFACE STRENGTH 0.005 TO 0.015 LAMINATE	CLIENT CONTRACTOR DRAWN DESIGNED CHECKED PROJECT	DATE 10/08/2013 DATE 10/08/2013 DATE 10/08/2013	TITLE OUTLINE DRAWING OF 3" S.S.304 RING VAC
1. LINEAR DIMS: .005 .010 .020 .030 .040 .050 .060 .070 .080 .090 .100 .125 .150 .175 .200 .250 .300 .375 .450 .500 .625 .750 .875 1.000 1.250 1.500 1.750 2.000 2.500 3.000 3.500 4.000 4.500 5.000 6.000 7.000 8.000 9.000 10.000	CLIENT CONTRACTOR DRAWN DESIGNED CHECKED PROJECT	DATE 10/08/2013 DATE 10/08/2013 DATE 10/08/2013	TITLE OUTLINE DRAWING OF 3" S.S.304 RING VAC	10520 YONCE STREET, UNIT 208-220, RICHMOND HILL, ON L4C 3C7 TEL: (416) 410-1313 & FAX: (416) 410-1808 www.nex-flow.com				