

5

4

3

2


1

C

C


B

B

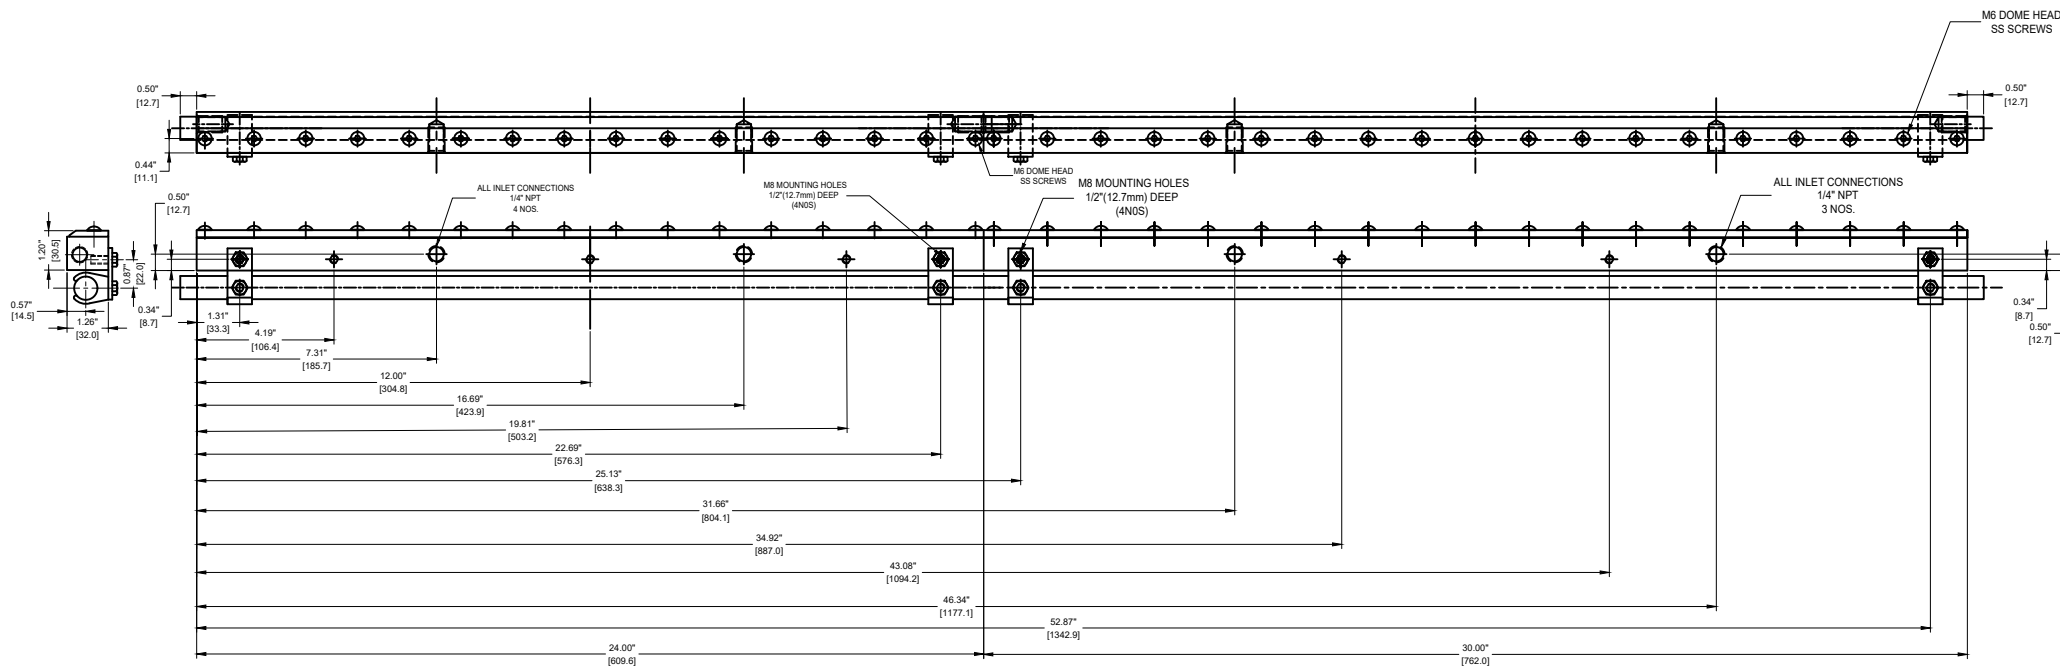

PROPRIETARY

REPRODUCTION OR DISTRIBUTION
WITHOUT WRITTEN CONSENT OF
NEXFLOW™ PRODUCTS IS PROHIBITED.



REQUIREMENTS—UNLESS OTHERWISE SPECIFIED	CONTRACT NUMBER	CLIENT	CONTRACTOR	DATE
GENERAL	—	—	—	19/11/2020
1. DIMS ARE IN INCHES (MM)	—	—	—	—
2. DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH ANSI Y14.5 (1982)	—	—	—	—
3. MACHINE FINISH 125 MICRO INCH RMS	—	—	—	—
4. INTERNAL RADI .015	—	—	—	—
5. BREAK SHARP CORNERS .005 TO .015	—	—	—	—
LIMITS	—	—	—	—
1. LINEAR DIMS. .XX = .005 .XX = .010 .X = .030	—	—	—	—
2. ANGLES = ± 1/2°	—	—	—	—
3. RUNOUT .010 TIR	—	—	—	—
NEXT ASSEMBLY	USED ON	QTY PER ASSY	PART NO	
PART NO				

STRESS	MANUFACTURING	THERMAL	MATERIALS	MECHANISM	ELECTRICAL
—	—	—	—	—	—

NEX FLOW AIR PRODUCTS CORP. 10520 YONGE STREET, UNIT 35B-220, RICHMOND HILL, ON L4C 3C7 TEL.: (416) 410-1313 & FAX: (416) 410-1806 www.nex-flow.com					
TITLE OUTLINE DRAWING OF 54" STANDARD AIR BLADE AIR KNIFE WITH RN IONIZER / VS IONIZER					
SIZE	CAGE CODE	DWG NO	RELEASE	REV	
—	—	15054/16054	—	—	
SCALE	1:1	CAD NO	—	SHEET	1 OF 1

5

4

3

2

1

A

A